


Lifting and Salvage

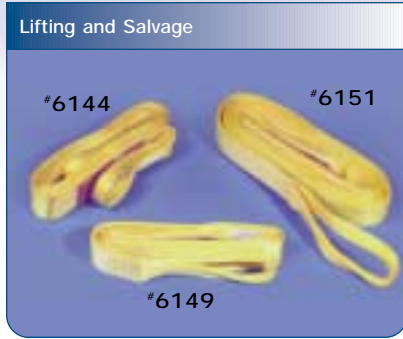

2" Double Ply Strap

- 8" eye at both ends
- 6,400 lbs. vertical lift
- 5,120 lbs. choker lift
- 12,800 lbs. basket lift

Order#: 6149 - 2" Double Ply Strap - 6'
 Order#: 6150 - 2" Double Ply Strap - 12'

2" Attachment Strap

- Single ply 8" eye at both ends
- 3,200 lbs. vertical lift
- 2,560 lbs. choker lift
- 6,400 lbs. basket lift

Order#: 6144 - 2" Attachment Strap - 6'
 Order#: 6145 - 2" Attachment Strap - 12'

2" Multiloop Attachment Strap

- Double ply strap
- 8" eye at both ends
- Loops sewn at 8" intervals along length
- 6,400 lbs. vertical lift
- 5,120 lbs. choker lift
- 12,800 lbs. basket lift

Order#: 6151 - 2" Multiloop Attachment Strap - 6'
 Order#: 6146 - 2" Multiloop Attachment Strap - 12'



Multiloop Construction

Lifting and Salvage



Open-bottom lift bags are designed for general purpose lift operations.

Enclosed pillow bags are totally enclosed with over-pressure relief valves to vent expanding air automatically as they ascend.

Carter Open-Bottom Lift Bags

Order#	Lift/lbs.	Material/oz.	Vol./cu. ft.	Weight/lbs.	Attachment
6175	50	18	0.8	1	single
6176	100	18	1.6	2	single
6177	300	28	4.8	4.8	single
6178	500	28	8	9	single
6179	1,000	28	16	12	single
6180	2,000	28	32	19	single
6181	5,000	36-40	80	42	single

Carter Enclosed-Pillow Lift Bags

Order#	Lift/lbs.	Material/oz.	Vol./cu. ft.	Weight/lbs.	Attachment
6182	500	28	8	9	single
6183	1,000	28	16	13	single
6184	2,000	28	32	22	single
6185	4,000	36-40	64	37	single

Carter Enclosed-Salvage Tubes

Order#	Lift/lbs.	Material/oz.	Vol./cu. ft.	Weight/lbs.	Attachment
6415	2,000	36-40	32	30	multiple
6376	3,000	36-40	48	40	multiple

Carter EZ-Float Lift Bags

Order#	Lift/lbs.	Material/oz.	Vol./cu. ft.	Weight/lbs.	Attachment
6186	2,000	28	32	25	multiple



Lifting and Salvage



200 ft. 1/4" Air Line with Quick Disconnect

- 1/4" inside diameter
- 300 PSI rated air line
- For remote lift bag inflation
- Each end equipped with a 1/4" male quick disconnect fitting

Order#: 6188

Basic/Deluxe Lift Bag Manifold and Regulator

- Simultaneous or independent remote inflation of one to four lift bags
- In-line ball valve and 1/4" quick disconnect on each stage
- Bleeder valve allows cylinder changing
- 200 PSI working pressure
- All brass construction
- Overpressure relief safety valve
- High-quality balanced first-stage regulator and pressure gauge
- Padded protective case

Order#: 6378 - Basic (inflation of 1-2 lift bags)

Order#: 6379 - Deluxe (inflation of 1-4 lift bags)

Lifting and Salvage



Subsalve USA Enclosed Rectangle Flotation Bags

Order#	Lift/lbs.	Material	Height	Length	Weight/lbs.
8607	550	Urethane-Coated Ballistic Nylon	2' 8"	4' 3"	20
8608	1,100	Urethane-Coated Ballistic Nylon	3' 8"	4' 3"	32
8609	2,200	Urethane-Coated Ballistic Nylon	4' 7"	5'	50

Subsalve - Lifting and Salvage



Subsalve USA Professional Lift Bags

Order#	Lift/lbs.	Material	Height	Length	Weight/lbs.
8611	1,100	Urethane-Coated Ballistic Nylon	2' 11"	4' 8"	17
8612	2,200	Urethane-Coated Ballistic Nylon	3' 8"	5' 3"	30
8613	4,400	Urethane-Coated Ballistic Nylon	4' 6"	7' 10"	50

Subsalve USA VRS-2000 Vehicle Recovery System

Order#	Lift/lbs.	Material	Height	Length	Weight/lbs.
8619	2x2,200	Urethane-Coated Ballistic Nylon	4' 7"	5'	65

Subsalve USA Salvage pontoons

Order#	Lift/lbs.	Material	Height	Length	Weight/lbs.
8615	2,200	Urethane-Coated Ballistic Nylon	3' 8"	4' 4"	50
8616	4,400	Urethane-Coated Ballistic Nylon	3' 8"	6' 6"	80

Lift Bags can make your salvage operations easier with the proper training. (see page 10)