

**Quick Disconnect Snap Shackle**

- Quick disconnect from chest harness while using surface-supplied air or current diving
- 5,000 lbs. tensile strength
- Lanyard

Order#: 6711

**Quick Disconnect Snap Shackle with Clevis**

- Quick disconnect from chest harness while using surface-supplied air or current diving
- Bail equipped with clevis pin
- 3,500 lbs. tensile strength
- Lanyard

Order#: 6711A



**Luxfer Aluminum Bail-Out Bottle**

- 13 cubic foot cylinder
- Equipped with K-valve
- 3,000 PSI service

Order#: 6346

**Bail-Out Bottle Mounting Bracket**

- Low-profile mounting for bail-out bottles
- Stainless steel construction
- Provides solid attachment of bail-out bottles

Order#: 6340



**DCS-Dive Control System 2-A**

- Controls the diver's air supply, communications and monitors depth
- One or two diver capability
- Can use scuba cylinders or low-pressure compressor for air source
- Built-in hardwire communications
- Depth monitoring for two divers
- Available Options: umbilical shutoff, wireless tender headset and headset with boom mic


Order#: 6216



**J.L. Diving Harness**

- For surface-supplied air diving
- Provides attachment point for manifold block and umbilical
- 2" heavy duty nylon webbing
- Stainless steel welded D-rings

Order#: 6650

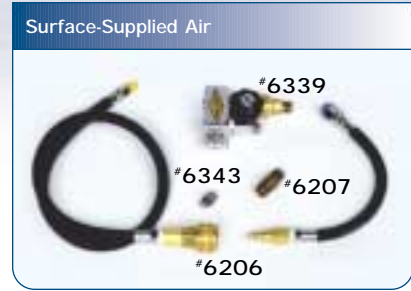

**DSI Manifold Block**

- Allows full face masks to be used for surface-supplied air diving
- Can be used for diving with a full face mask and bail-out bottle
- 4 low-pressure ports
- Primary air inlet equipped with high-flow one-way valve and standard scuba adaptor
- Back-up air inlet equipped with 3/8" scuba thread

Order#: 6339

**DSI Scuba Adapter Fitting**

- Allows the DSI Manifold Block (#6339) to be used for scuba
- Replaces the 9/16" O<sub>2</sub> fitting on the manifold block

Order#: 6207

**DSI Overpressure Relief Valve**

- Use when two air sources are attached to DSI Manifold Block (#6339)
- Installs in a low-pressure port of the first stage regulator attached to the bail-out bottle
- Prevents hose rupture to the bail-out whip
- 200 PSI vent pressure

Order#: 6343

**Quick Disconnect Hose**

- Use between bail-out first stage and DSI Manifold Block (#6339)
- 42" in length
- Equipped with Hanson Quick Disconnect Coupling

Order#: 6206

*Dive Rescue International offers a full line of steel and aluminum scuba tanks.*



Surface-Supplied Air



### Surface-Supplied Air Diving Umbilical

- Umbilicals are custom designed and manufactured for your specific needs
- Floating and non-floating air lines
- Reusable or banded fittings
- Taped and braided styles
- Contact our Equipment Sales Department to discuss your umbilical needs

Order#: 6342

Surface-Supplied Air



### AquaLite Twisted Umbilical

- Kink and abrasion resistant
- Clean and odor-free tube
- Flexible and does not deteriorate significantly with age
- Standard lengths are 1,000 ft. (longer lengths available)
- Can incorporate electrical cables such as communications and video
- Buoyant in sea and fresh water
- Corrosion resistant Naval brass reusable fittings are available

Order#: 6347

### Umbilical Storage Bag

- Stores up to 200 ft. of 3-member umbilical
- Tender can feed umbilical directly from bag to diver
- Cordura® nylon and heavy duty nylon mesh construction
- Handles at both ends and around the circumference of the bag

Order#: 6349

Surface-Supplied Air



### Work-and-Weight System

- Ideal for surface-supplied air, current and technical diving operations
- Provides two umbilical mounting points
- Holds up to 40 lbs. of dive weight
- Fully adjustable for all body sizes with integrated chest harness
- Quick ditch weight pockets can be reinstalled without removing the harness
- Detachable manifold block mounting system
- Complete illustrated instructions, training outline and training record

Order#: 6775

### Work-and-Weight System Accessories

- Order#: 6775A – Weight Pockets (pair)
- Order#: 6775B – Shot Pouch (Holds 5 lbs.)
- Order#: 6775D – Harness Only

Surface-Supplied Air



### Dive Rescue Manifold Mounting Strap

- Attaches DSI Manifold Block (#6339) to Work-and-Weight System (#6775)
- Replacement or extra strap for Work-and-Weight System

Order#: 6775C